



# PRESS-IN NUT

## FLUSH ON BOTH SIDES, STAINLESS STEEL (BF)

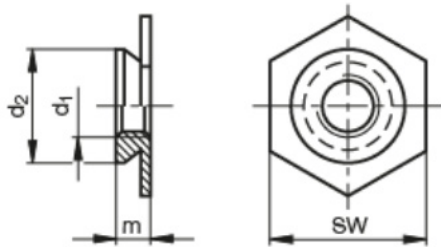

Thread d <sub>1</sub>	Ø in metal sheet +0,08 0	Maxi- mum d <sub>2</sub>	d3 ±0,25	m ±0,25	Wrench size sw  ±0,25	m	Max. thick- ness metal sheet	Min. Dis- tance to middle hole	Ordering description
metrics M2	4,40	4,35	6,30	1,50	4,8	1,53 2,30	1,5 2,3	6.0	BF-M2-1 BF-M2-2
metrics M2,5	4,40	4,35	6,30	1,50	4,8	1,53 2,30	1,5 2,3	6.0	BF-M2,5-1 BF-M2,5-2
metrics M3	4,40	4,35	6,30	1,50	4,8	1,53 2,30	1,5 2,3	6.0	BF-M3-1 BF-M3-2
metrics M4	7,40	7,35	7,90	2,00	7,9	1,53 2,30	1,5 2,3	7.2	BF-M4-1 BF-M4-2
metrics M5	7,90	7,88	8,70	2,00	8,7	1,53 2,30	1,5 2,3	8.0	BF-M5-1 BF-M5-2
metrics M6	8,75	8,72	11,05	4,08	9,5	3,10 3,90 4,70	3,2 4,0 4,7	8.8	BF-M6-3 BF-M6-4 BF-M6-5

Type BF: Stainless steel 18/8 (AISI300), passivated, especially suitable for thin aluminum sheets, for sheet hardness up to HRB-70, after mounting on both sides survived.

Errors and changes excepted